


60 mm Klikpaneel Datablad

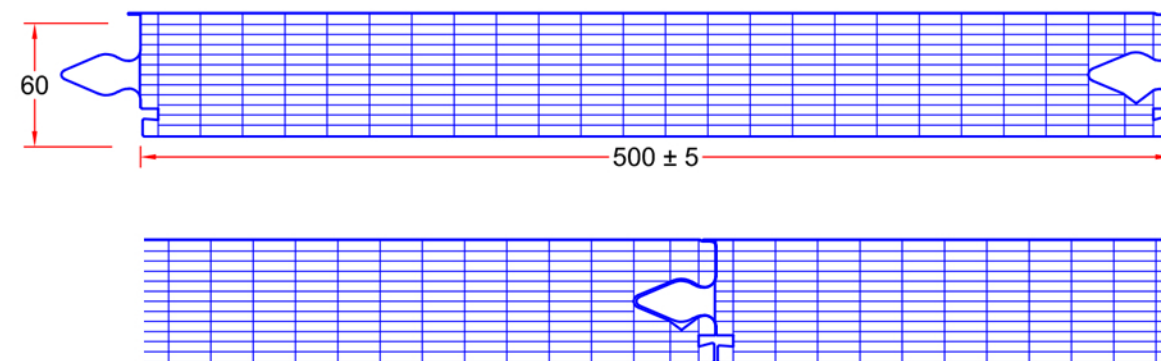

TECHNICAL DATA

Panel modular width	500 ± 5	mm
Pannel thickness (± 0,5 mm)	60	mm
No. of walls	13	
Thermal transmission [U-value]	0,71	W/m ² K
Light transmission	Clear satinized (*)	~ 39 %
	Opaline (*)	~ 16 %
 SPANS $q = 500 \text{ N/m}^2$ (wind $\approx 100 \text{ km/h}$) $q = 800 \text{ N/m}^2$ (wind $\approx 130 \text{ km/h}$)	4.100	mm
	3.500	mm
Fire classification EN13501-1	B s1 d0	
Thermal expansion	0,065	mm/m K
Temperature range	-40 / +120	°C
(*) standard colours - other colours produced on request		